

ChargePoint Home Flex

Specifications and Ordering Information



ChargePoint® Home Flex

Ordering Information


The order codes below represent specific product configurations. Other product options are available. Please contact ChargePoint Sales for information and order codes.

Hardware

Description		Order Code
Station and Cable Model	16A-50A, NEMA 6-50 plug, 7010.4 mm (23 ft) Charging Cable	CPH50-NEMA6-50-L23
	16A-50A, NEMA 14-50 plug, 7010.4 mm (23 ft) Charging Cable	CPH50-NEMA14-50-L23
	16-50A, Hardwired, 7010.4 mm (23 ft) Charging Cable	CPH50-HARDWIRE-L23
Replacement Cable	7010.4 mm (23 ft) Charging Cable	CPH50Cable-T1-50A-L23-F

Architectural Drawings (Dimensions)

Weight: 6.26 kg (13.8 lb)

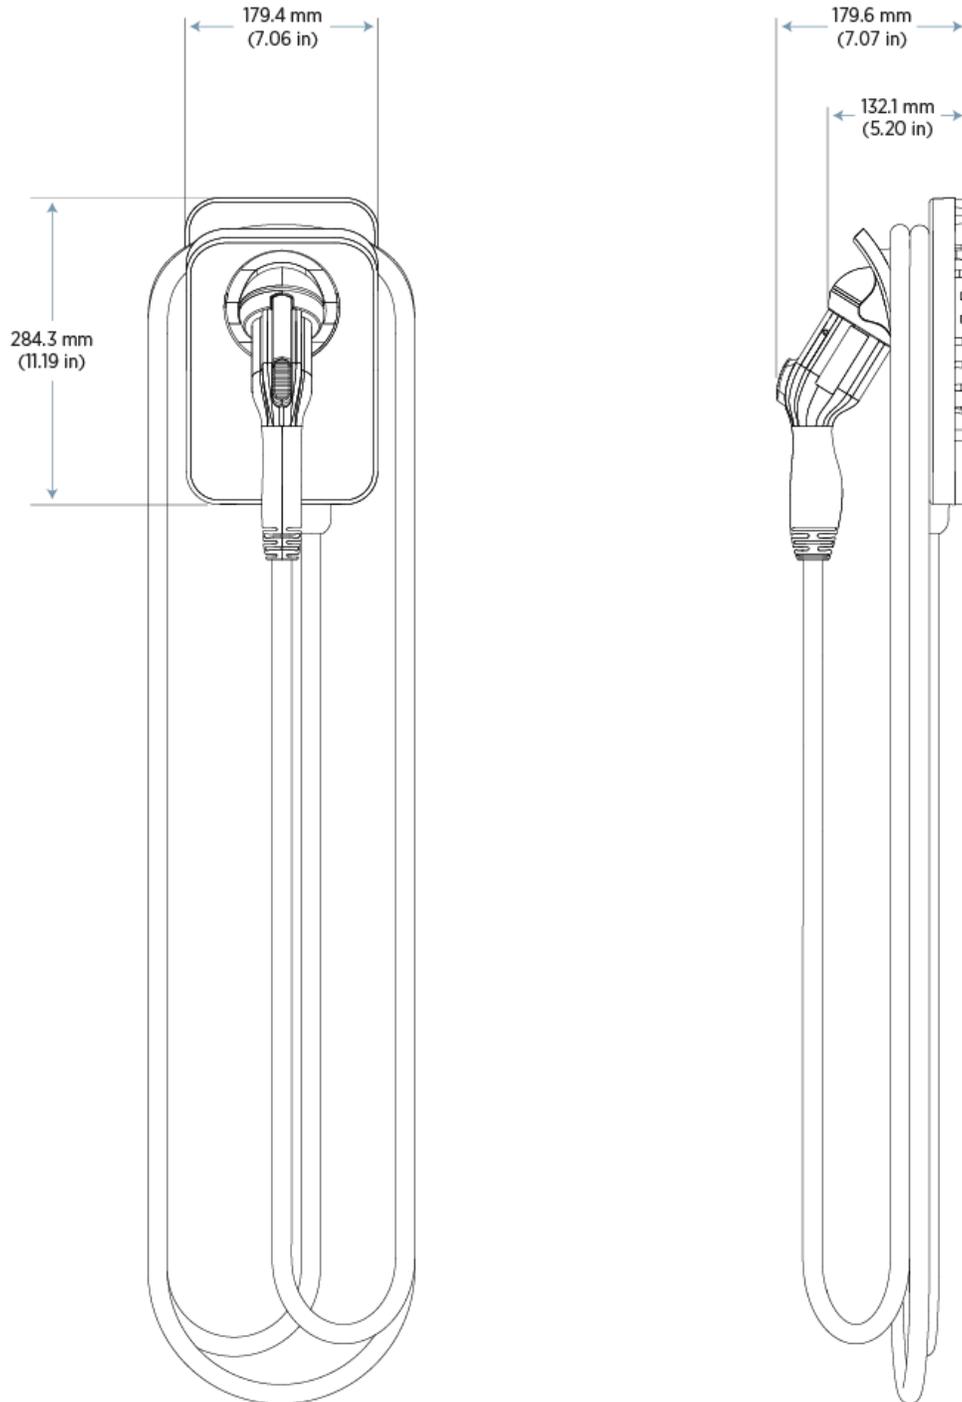

General Specifications

Connector and Electrical

Input Cord	NEMA 6-50 or NEMA 14-50
AC Power Output Rating	Maximum 12 kW (240V AC * 50A). Output amperage adjustable via mobile app to 16A, 24A, 32A, 40A, 48A, 50A.
AC Power Input Rating	208/240V AC 60 Hz single phase @ 16A, 24A, 32A, 40A, 48A, 50A
Required Service Panel Breaker	Dedicated Dual Pole rated for 125% of maximum load (ex: 50A breaker for 40A output)
Service Panel GFCI	External GFCI may conflict with internal GFCI (CCID). For hardwired installations, use a non-GFCI circuit breaker.
Power Wiring	3 Wire – L1, L2 plus Earth (no neutral)
Charging Cable Length	7010.4 mm (23 ft)
Connector Type	SAE J1772™
Power Measurement Accuracy	+/- 2.0% from 2% to full scale
Power Report/Store Interval	15 minute aligned to hour

Safety and Connectivity Features

Ground Fault Detection	20 mA CCID with auto retry
Open Safety Ground Detection	Continuously monitors presence of safety (green wire) ground connection
Plug-Out Detection	Power terminated per SAE J1772 specifications
Local Area Network	2.4/5 GHz WiFi (802.11 a/b/g/n)
Device Storage	Local data storage with capacity of up to 90 days of charging session data (100 sessions) in case of interrupted network connection
Software Updates	Firmware updated over-the-air (OTA)

Safety and Operational Ratings

Station Enclosure Rating	Type 3R per UL 50E
Safety and Compliance	UL and cUL listed; complies with UL2594, UL2231-1, UL2231-2. NEC article 625 compliant. For Canada CSA C22.2, No. 280, 281.1, 281.2, CEC
EMC Compliance	FCC Part 15 Class B
Storage Temperature	-40°C to 60°C (-40°F to 140°F) ambient
Operating Temperature	-30°C to 50°C (-22°F to 122°F) ambient
Operating Humidity	Up to 95% at 50°C (122°F) non-condensing
Non-Operating Humidity	Up to 95% at 50°C (122°F) non-condensing
ENERGY STAR® Certification	Yes

Indicators

WiFi LED	Yes
Fault Indicator per UL	Yes
Status LED	Yes

Installation

Install Software	Mobile App (iOS & Android)
Outdoor Installation	Hardwired installation or weatherproof NEMA receptacle Note: Required by code to install an outdoor rated GFCI breaker upstream for outdoor plug-in installation

ChargePoint, Inc. reserves the right to alter product offerings and specifications at any time without notice, and is not responsible for typographical or graphical errors that may appear in this document.